RBR1224
Electronic Toggle/Ratchet Relay

Rev. DSRBR1224 - G14J

Overview

- Snap track mountable relay module.

Specifications

- 12VDC to 24VDC operation.
- Positive (+) or negative (-) ultra sensitive trigger (3VDC to 24VDC @ 20mA minimum).
- DPDT contacts rated at 2 amp/120VAC/28VDC.
- Relay status LED.
- Remote LED status output.
- Snap track mountable (order part # ST3).

Board dimensions (approximate): 3"L x 2.5"W x 1"H

Applications

- Use with PGM alarm control panel outputs.
- Electronically shunt-alarm zones, door control or keypads.
- Interfaces with wireless receivers.
- Converts momentary to maintained contacts.

Mounting Diagrams

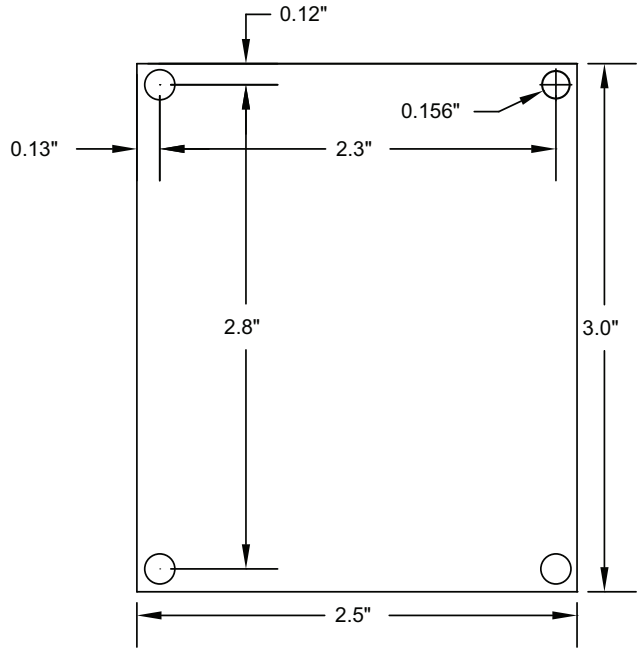

ST3 Mechanical Drawing